



Model Name SL460 Digital Signage


Unique selling point

- * EZ-Suite Software support
- * PID panel with high reliability of usage
- * 50,000 hours backlight life for long use (24/7)
- * Landscape & Portrait orientation mode support
- * Display Port IO support for high resolution picture quality
- * Ambient light sensor for eye care & energy saving
- * MDA Software for multiple display control remotely

Panel	Screen Diagonal	46"	
	Backlight	LED	
	Resolution	FHD 1920 x 1080 (pixels)	
	Aspect Ratio	16 : 9	
	Brightness	500nits	
	Contrast Ratio	4000:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	6.5ms	
	Panel bit	10 bit (8bit+FRC), 1073.7M	
	Light life	50,000 hrs (typ.)	
Orientation	Landscape / Portrait		
Interface	Input/Output	Power (AC) In/ Out	x 1
		Audio line-in	x 1
		Composite video In/ Out (BNC)	x 1
		Composite audio In/ Out (RCA)	x 1
		Component video (RCA)	x 1
		External Speaker Out (L/R)	x 1
		D-sub In/ Out	x 1
		HDMI (Type A)	x 1
		DVI-D Input	x 1
		DisplayPort Input	x 1
		RJ45	x 1
	RS232 In/ Out	x 1	
	Others	AC power switch	x 1
USB (type A) for WiFi dongle		x 1	
USB (mini B) for USB display or external storage		x 1	
Mechanical	Dimensions(W x H x D)	1052 x 606 x 84 mm	
	Bezel Width (T/B/L/R)	14.9/14.9/14.9/14.9 mm	
	Weight (without packing / with packing)	22/25.5 kg	
Power	Power supply	100 V ~ 240 V, 50 Hz / 60 Hz	
	Power consumption	<150W, 130W (Typ.)	
OSD	On-Screen Display Languages	English/ French/ Portuguese/ Spanish/ Simplified Chinese/ Traditional Chinese(6 Languages)	
Software	EZ Suite	Supported OS for EZ USB: 1. Windows XP 32/64 bit SP3 (Professional or higher) 2. Windows Vista 32/64 bit SP2 (Home premium or higher) 3. Windows 7 32/64 bit SP1 (Home premium or higher) 4. Mac OS 10.7 or higher Supported OS for EZ view /EZ display : 1. Windows XP SP3, Vista SP2, Win 7 SP1 and Win8 (not support Starter version) 2. Mac OS X 10.7 and above 3. Android 4.0 or above (download from Google Play) 4. iOS iOS 5.1 and above (Download from Apple Store)	
	Multiple Display Control (MDA)	Supported OS for EZ USB: 1. Windows XP 32 bit 2. Windows Vista 32/64 bit SP2 3. Windows 7 32/64 bit	
Accessories	Standard	Remote Control w/ Battery	x 1
		Power Cord (by region)	x 1
		Quick Start Guide	x 1
		VGA(D-sub 15pin) Cable	x 1
	Optional	Stand	
	WiFi Dongle (USB type)		

SL460 Digital Signage

Input/output terminals

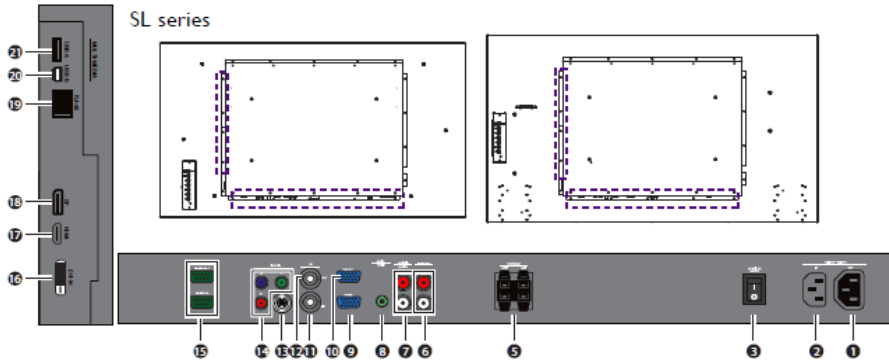


No.	Name	Description
1	AC OUT	Relays the AC power from the AC IN jack to another display.
2	AC IN	Connects to a power outlet via the supplied power cord.
3	AC SWITCH ON/OFF	Turns on or off the main power.
4	USB (IL series only)	Connects the USB cable from the display to a computer to use the touch module.
5	SPEAKERS (R/L) (Not for the L650)	Outputs audio signals to external speakers.
6	AUDIO OUT (R/L)	Outputs audio signals to an external device.
7	AUDIO IN (AUDIO2)	Receives audio signals from an external device (such as a VCR or DVD player).
8	AUDIO IN (AUDIO1)	Receives audio signals from an external device (such as a computer).
9	VGA IN	Receives analog RGB signals from an external device (such as a computer).
10	VGA OUT	Outputs analog RGB signals from the VGA IN input to another display.
11	AV IN	Receives composite video signals from an external device (such as a VCR or DVD player).
12	AV OUT	Outputs composite video signals from the AV IN input to another display.
13	VIDEO IN (S-VIDEO)	Receives S-Video signals from an external device (such as a VCR or DVD player).
14	VIDEO IN (YPbPr)	Receives component video (YPbPr) signals from an external device (such as a DVD player, HDTV device or Laser disc player).
15	RS232C IN/OUT	For external control and multi-display operation. • RS232C IN: receives control signals from a computer or another display. • RS232C OUT: outputs control signals from the RS232C IN input to another display.
16	DVI-IN	Receives DVI signals from an external device (such as a computer).
17	HDMI	Receives HDMI signals from an external device (such as a Blu-ray disc player).
18	DISPLAY PORT	Connects to a DisplayPort compatible device.
19	RJ-45	Connects to the RJ-45 port on your Ethernet or router.
20	USB B (Mini B) (SL series only)	Connects to a computer for USB display.
21	USB A (Type A) (SL series only)	Connects to a USB flash drive or WiFi dongle.

Wallmount

42"/46"

*Screw type: M6

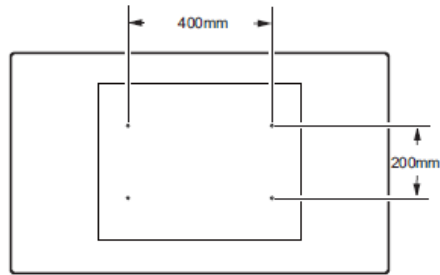

Dimension

