



**Model Name**

**RP653 IFP Spec**


**Unique selling point**

- \* IR 20-points Multi-touch (up to 20 points)
- \* Touch Driver Free/ Multi-Platform Support
- \* Build-in Annotation EZWrite SW
- \* Anti-Glare/Low Blue Light
- \* OSD Menu with Touch/NFC


<b>Panel</b>	Screen Diagonal	65"	
	Backlight	Direct LED	
	Resolution	1920 x 1080	
	Aspect Ratio	16 : 9	
	Brightness	350	
	Contrast Ratio	1400:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	6ms	
	Panel bit	8-bit	
	Light life	30000hrs	
	Orientation	Landscape	
<b>Touch solution</b>	Touch tech.	IR	
	Number of touches	Multi-touch up to 20 touches	
	Touch interface	USB x 1	
	Resolution	32767 x 32767	
<b>Cover glass</b>	Thickness	Tempered, 4 mm	
	Hardness	7H	
	AG coating	80%	
<b>Speaker</b>	Built-in speaker	10W x 2	
<b>Interface</b>	<b>Input</b>	Power (AC) Inlet	x 1
		Audio line-in	x 3
		Composite video	x 1
		Composite audio	x 1
		Component video (RCA)	No
		D-sub	x 3
		Type A HDMI	x 3
		Type A (USB Playback)	x 4
		RS232	x 1
		S-video	No
		SPDIF	No
		LAN	x1
		<b>Output</b>	Composite AV
	RS232		No
	D-sub		x 1
	Earphone		x 1
	COAX		x 1
	<b>Others</b>		NFC Reader/Writer
		IR receiver	x 1
<b>Mechanical</b>	Dimension (WxHxD) (Without Packing / With Packing)	1523* 924* 98mm / 1697*1071*220mm	
	Net Weight/Gross Weight	46kg/57kg	
	<b>Power</b>	Power supply	AC100 to 240V, 50 to 60 Hz
	Power consumption	<211W	
<b>OSD</b>	On-Screen Display Languages	EN / EF / SP / EP / CN / TC / GM / DT / PL / RS / CZ / DN / SW / IT / RM / FN / NG / GK / TK / AB / JP (21 Languages)	
<b>Accessories</b>	<b>Standard</b>	Remote Control w/ Battery	x 1
		Power Cord (by region)	x 4
		Touch pen	x 2 (NFC)
		Quick Start Guide	x 1
		Audio cable	x 1
		Touch Cable (USB to USB)	x 1
		VGA(D-sub 15pin) Cable	x 1

## Input/output terminals

Items	Function description
① USB	Connect USB devices such as mobile hard disk, U disk, USB keyboard and mouse, USB drives, etc
② HDMI IN	High-definition multimedia interface signal input, connect to PC (personal computer) with HDMI output, set-top box, or other video device can also realize touch function (HDMI13 can realize MHL function).
③ VGA OUT	Connected to display devices with VGA input function
④ AUDIO IN	External computer audio input
⑤ VGA IN	External computer image input
⑥ TOUCH	External computer touch signal input. Default touch function is available under internal computer, when connecting external computer, besides connecting external computer VGA and audio signals, external computer's USB port needs to be connected to the equipment. Under the condition that driver is installed, external computer can be touch controlled through the equipment (touch function is effective in PC, VGA and HDMI channel by default)
⑦ AV IN	Composite video and audio input
⑧ COAX OUT	Coaxial output
⑨ RS232	Serial interface, used for mutual transfer of data between devices
⑩ EARPHONE	Connected to device with headphone input function
⑪ WAN	WAN interface, connecting RJ45 terminals. (This network port is only used for Android system)

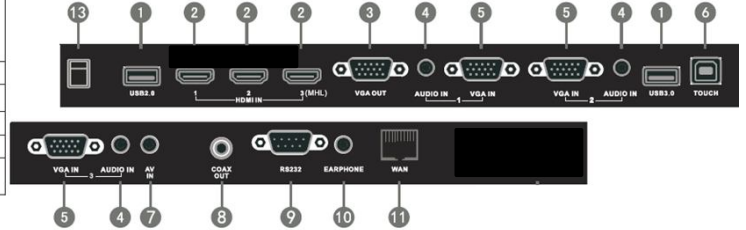

## Wallmount

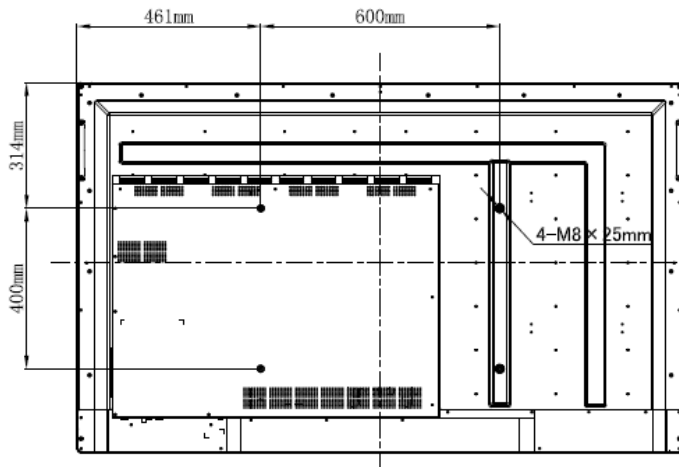

## Dimension

